

SI ABRASIVE

RAKABRASPIR CEMENTO 10 SP

RAKABRASPIR SILO 7 SP


RAKSAND TURBOCORD 10







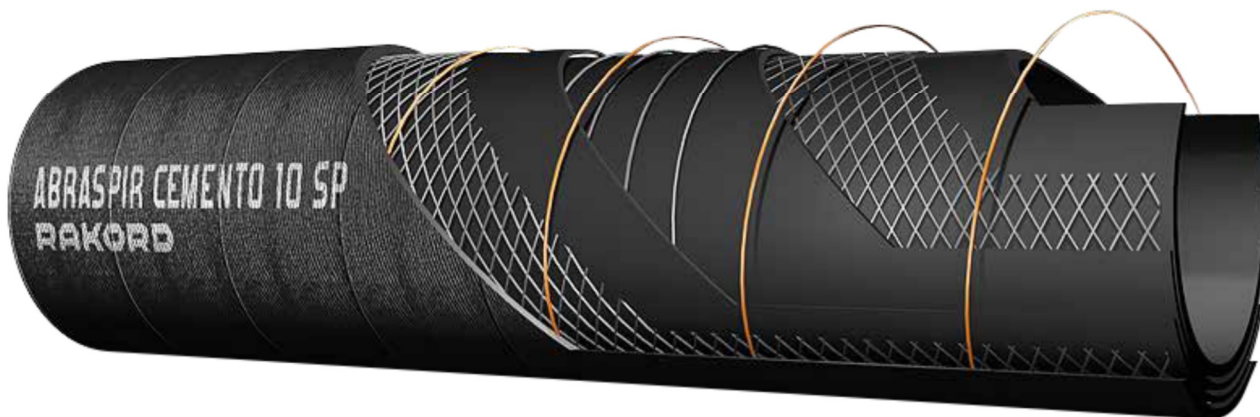

RAKABRASPIR PLASTER 40

RAKABRASPIR CLC HARD

RAKABRASPIR CLC ECO

RAKSTREETCLEANER










RAKABRASPIR CEMENTO 10 SP

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009701050	50	64	10	30	-	-	1780	40
4009701060	60	74	10	30	-	-	2120	40
4009701070	70	84	10	30	-	-	2510	40
4009701080	80	95	10	30	-	-	3070	40
4009701100	100	118	10	30	-	-	4680	40
4009701120	120	140	10	30	-	-	6100	40


TEMPERATURE RANGE	-40 °C to +70 °C
SAFETY FACTOR	3:1
NORM	Abrasion acc.to. DIN 53516
REINFORCEMENT	textile wrapped, anti deflection embedded helix
TUBE	SBR/NR, black, smooth, antistatic
COVER	SBR/NR, black, smooth, cloth impression, antistatic
USE	Bulk abrasive materials suction and discharge hose.









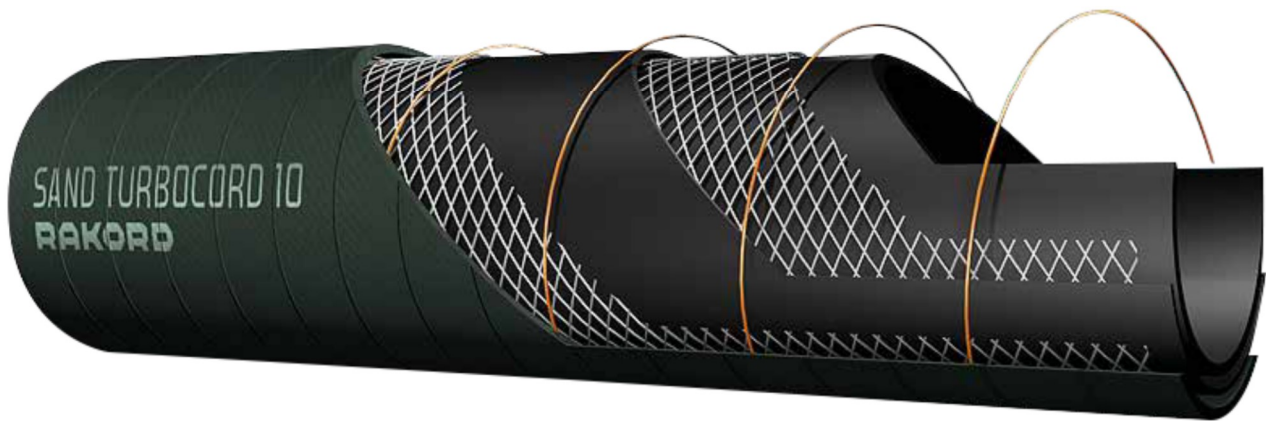

RAKABRASPIR SILO 7 SP

Art. nr.	 mm	 mm	 bar	 bar		 mm	 g	 m
4009702050	50	64	7	21	-	350	1600	40
4009702076	76	90	7	21	-	532	2400	40
4009702080	80	97	7	21	-	560	3100	40
4009702090	90	108	7	21	-	630	3700	40
4009702102	102	120	7	21	-	714	4100	40
4009702110	110	128	7	21	-	770	4400	40
4009702125	125	143	7	21	-	875	5000	40

TEMPERATURE RANGE	-30 °C to +85 °C
SAFETY FACTOR	3:1
NORM	Abrasion acc.to. DIN 53516
REINFORCEMENT	high tensile textile cord, steel helix, antistatic wire
TUBE	NR/SBR, black, smooth
COVER	SBR, black, smooth, cloth impression, abrasion and
USE	Special hose for pneumatic or hydraulic transport of abrasive media such as cement, sand etc. antistatic compound of hose liner protects from static electricity.










RAKSAND TURBOCORD 10

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009704019	19	34	10	30	-	-	680	40
4009704025	25	40	10	30	-	-	840	40
4009704032	32	48	10	30	-	-	1130	40
4009704040	40	60	10	30	-	-	1780	40
4009704050	50	72	10	30	-	-	2420	40
4009704060	60	82	10	30	-	-	2820	40

TEMPERATURE RANGE	-40 °C to +90 °C
SAFETY FACTOR	3:1
NORM	Abrasion acc.to. DIN 53516 < 50 mm ³
REINFORCEMENT	textile cord, electric static wire
TUBE	NR, black, smooth, electrical conductivity
COVER	NBR/NR, black, smooth with cloth impression antistatic
USE	Specially designed hose for professional use in all shot blast applications and suitable for all commonly used blasting media.











RAKABRASPIR PLASTER 40

Art. nr.								
4009705019	19	31	40	120	-	98	740	40
4009705025	25	39	40	120	-	125	900	40
4009705035	35	49	40	120	-	175	1200	40
4009705038	38	54	40	120	-	190	1880	40
4009705050	50	68	40	120	-	250	2200	40
4009705065	65	69	40	120	-	325	3800	40

TEMPERATURE RANGE	-30 °C to +80 °C
SAFETY FACTOR	3:1
NORM	Abrasion acc.to. DIN 53516
REINFORCEMENT	high tensile textile cord, steel helix, antistatic wire
TUBE	NR/BR, black, smooth
COVER	SBR, black, smooth, cloth impression, abrasion and
USE	High pressure hose for plaster spraying and mortar injection machines (abrasion 70 mm ³)










RAKABRASPIR CLC HARD

Art. nr.								
4009706050	50	62	5	15	0.9	150	1470	40
4009706075	75	93	5	15	0.9	225	3380	40
4009706080	80	96	5	15	0.9	240	3200	40
4009706090	90	106	5	15	0.9	270	3500	40
4009706100	100	120	5	15	0.9	300	4890	40
4009706125	125	145	5	15	0.9	375	6460	40
4009706150	150	172	5	15	0.9	450	9650	40

TEMPERATURE RANGE	-35 °C to +70 °C
SAFETY FACTOR	3:1
NORM	-
REINFORCEMENT	textile cord, steel helix, antistatic wire
TUBE	NR/SBR, black, smooth
COVER	NR/BR, black, slightly corrugated surface, antistatic, resistant to abrasion and ozone
USE	Special hose for pneumatic or hydraulic transport of abrasive media such as cement, sand etc.











RAKABRASPIR CLC ECO

Art. nr.								
4009707040	40	50	6	18	0.5	200	1115	40
4009707050	50	60	5	15	0.45	250	1550	40
4009707060	60	72	4	12	0.45	300	2120	40
4009707075	75	87	3	9	0.4	375	2880	40
4009707080	80	92	3	9	0.4	400	3060	40
4009707090	90	102	3	9	0.4	450	3410	40
4009707100	100	114	2	6	0.4	500	4222	40
4009707110	110	124	2	6	0.3	550	5100	40

TEMPERATURE RANGE	-35 °C to +70 °C
SAFETY FACTOR	3:1
NORM	-
REINFORCEMENT	textile cord, steel helix
TUBE	NR/BR, black, smooth
COVER	SBR, black, smooth with cloth impression, abrasion and weather resistant
USE	Special hose for high performance suction equipment for transport of dry or wet media such as mud, sand, or blasting media.


RAKSTREETCLEANER

Art. nr.								
4009712152	152	-	0.5	15	0.7	510	2550	0.5 - 8
4009712203	203	-	0.5	15	0.6	650	3500	0.5 - 8
4009712220	220	-	0.5	15	0.6	730	3900	0.5 - 8
4009712254	254	-	0.5	15	0.5	820	4450	0.5 - 8
4009712280	280	-	0.5	15	0.5	910	5050	0.5 - 8
4009712305	305	-	0.5	15	0.5	1000	5400	0.5 - 8
4009712400	400	-	0.5	15	0.3	1400	8300	0.5 - 8

TEMPERATURE RANGE	-40 °C to +85 °C
SAFETY FACTOR	3:1
NORM	-
REINFORCEMENT	textile cord, steel helix
TUBE	NR, black, highly resistant to abrasion, resistant to rot and microbes
COVER	SBR/EPDM, black, corrugated surface with smooth ends for assembling, perfect flexibility, ozone and abrasion resistant
USE	Special hose for street sweeping machines