

AIR

2

RAKAIRACTIV 20


RAKAIRCORD 20

RAKCOMPRESSOR 40







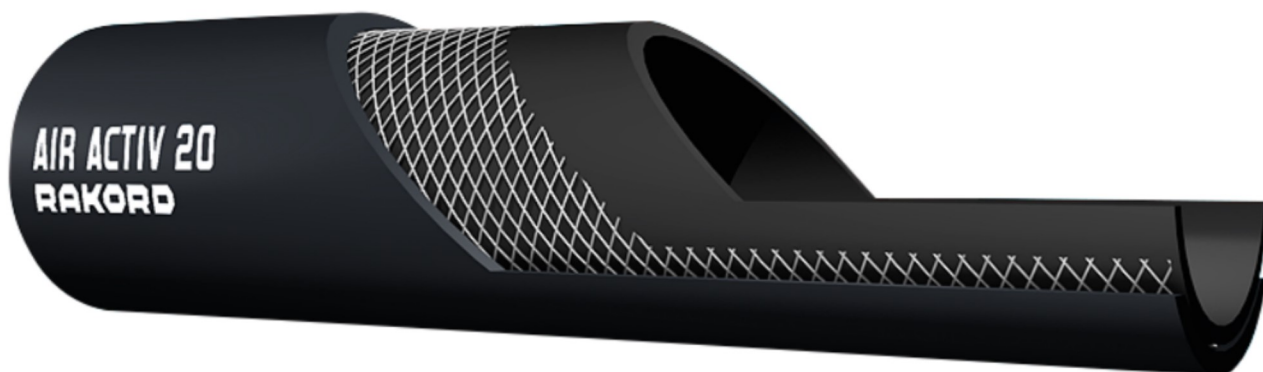

RAKCLIMA HEATING TR300

PYROFLEX® II HOT AIR


PLICORD® TORRIDAIR™ HOT AIR BLOWER









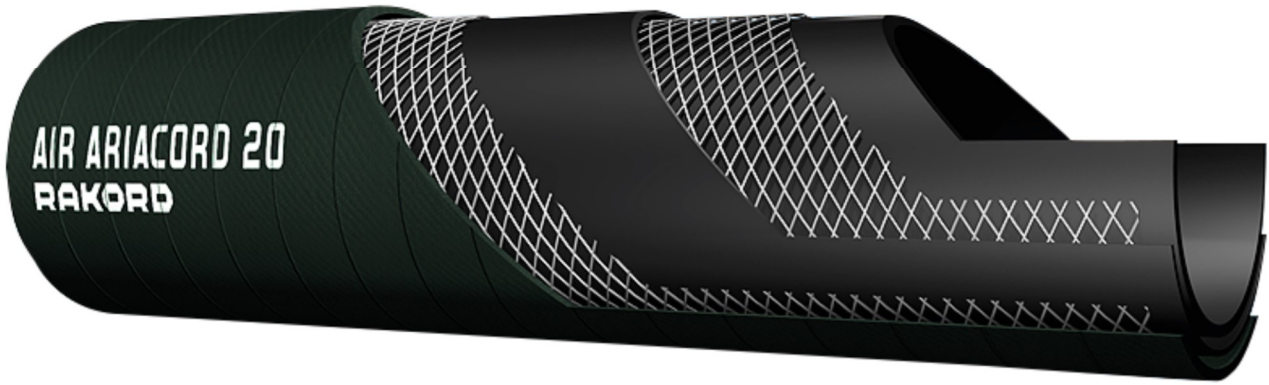

RAKAIRACTIV 20

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009203006	6	14	20	60	-	60	190	100
4009203007	7	16	20	60	-	70	245	100
4009203008	8	17	20	60	-	80	265	100
4009203010	10	19	20	60	-	100	310	100
4009203013	13	23	20	60	-	130	425	100
4009203016	16	26	20	60	-	160	495	50
4009203019	19	30	20	60	-	190	635	50
4009203025	25	37	20	60	-	250	800	50

TEMPERATURE RANGE	-25 °C to +70 °C
SAFETY FACTOR	3:1
NORM	ISO1307
REINFORCEMENT	textile wrapped
TUBE	SBR, black
COVER	PVC, black, smooth, abrasive and weather resistant.
USE	Compressed air, water and applications where a higher pressure is demanded. Suitable for compressors.











RAKAIRCORD 20

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009205013	13	23	20	60	-	130	397	40
4009205016	16	26	20	60	-	160	435	40
4009205019	19	30	20	60	-	190	550	40
4009205025	25	37	20	60	-	250	757	40


TEMPERATURE RANGE	-25 °C to +70 °C
SAFETY FACTOR	3:1
NORM	ISO1307
REINFORCEMENT	textile braid
TUBE	SBR, black, suitable for oil-laden air
COVER	SBR, black, smooth, cloth impression abrasive and weather resistant
USE	Suitable for delivering compressed air and water in power plants, road construction, tunnelling and quarrying.









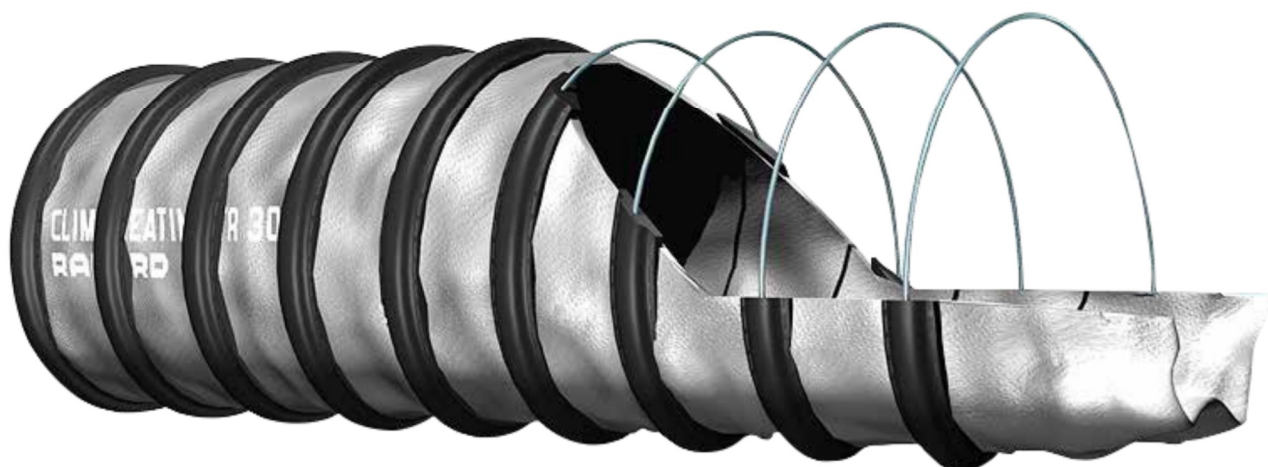

RAKCOMPRESSOR 40

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009207013	13	23	40	160	-	153	640	40
4009207019	19	30	40	160	-	228	666	40
4009207025	25	36	40	160	-	305	884	40
4009207032	32	43	40	160	-	384	1138	40
4009207038	38	50	40	160	-	456	1600	40
4009207051	51	66	40	160	-	612	2450	40
4009207063	63	80	40	160	-	762	3560	40
4009207076	76	94	40	160	-	915	4740	40
4009207102	102	122	40	160	-	1219	6232	


TEMPERATURE RANGE	-25 °C to +70 °C
SAFETY FACTOR	4:1
NORM	ISO1307
REINFORCEMENT	textile wrapped
TUBE	NBR, black
COVER	SBR, yellow, smooth, abrasion resistant and ozone
USE	A robust compressed air hose for lubricant-laden compressed air. Suitable for use in quarries, surface mining and road construction.









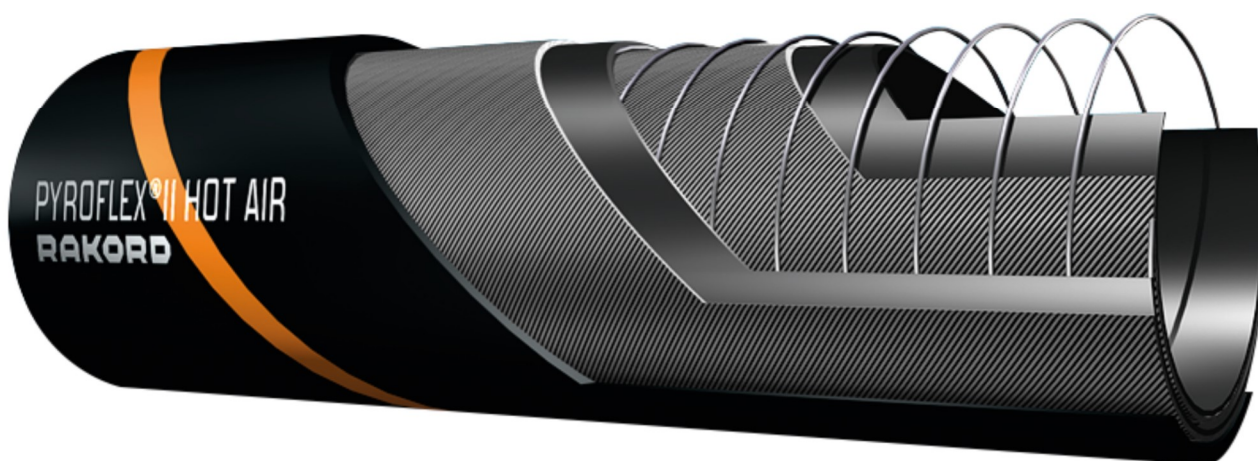

RAKCLIMA HEATING TR300

Art. nr.								
4009307063	63	-	-	-	0.170	*	0.45	3 - 10
4009307075	75	-	-	-	0.140	*	0.49	3 - 10
4009307080	80	-	-	-	0.125	*	0.51	3 - 10
4009307100	100	-	-	-	0.080	*	0.64	3 - 10
4009307125	125	-	-	-	0.050	*	0.79	3 - 10
4009307150	150	-	-	-	0.036	*	1.23	3 - 10
4009307200	200	-	-	-	0.020	*	1.67	3 - 10


TEMPERATURE RANGE	-85 °C to +310 °C
VARIANTS	design to max. temperature +250 °C - HEATING TR 250 design to max. temperature +400 °C - HEATING TR 400 design to max. temperature +500 °C - HEATING TR 500 design to max. temperature +600 °C - HEATING TR 600 design to max. temperature +1000 °C - HEATING TR 1000
MATERIAL	TR 300 hoses are manufactured of one layer of a specially coated thermo-fabric with sewed-on spring spiral and outer fire protection. The hose is seamless and has a close spiral distance and an absolutely smooth interior (reduced air resistance).Spiral-free sleeves at both ends.
USE	Heavy industry, glass manufacturing, fire departments, automotive industry, garages, shipyards, refineries, disaster prevention, airport floor service.









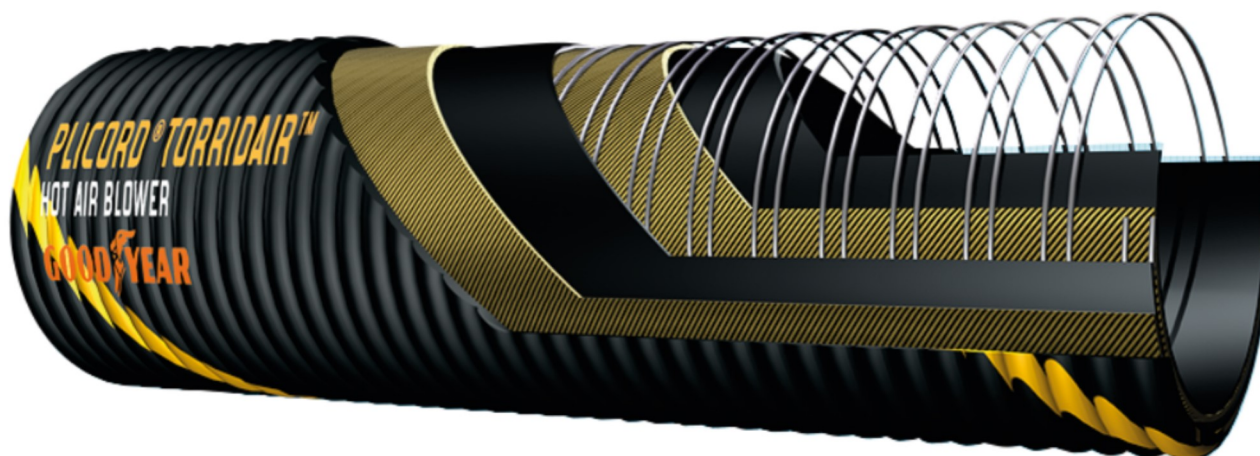

PYROFLEX® II HOT AIR

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009401051	51	65	3.4	13.6	-	127	1.82	30.5
4009401076	76	90	3.4	13.6	-	178	2.87	30.5
4009401102	102	117	3.4	13.6	-	254	3.94	30.5

TEMPERATURE RANGE	-29 °C to +163 °C
SAFETY FACTOR	4:1
NORM	-
REINFORCEMENT	Helix-plied synthetic fabric with helix spiral
TUBE	Black heat-resistant Versigard® EPDM rubber
COVER	Heat-resistant black Versigard® EPDM rubber with orange helix stripe
USE	For conveying hot air from compressors to tanks on dry bulk material carriers



PLICORD® TORRIDAIR™ HOT AIR BLOWER

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009402051	51	64	5.2	20.8	-	127	1.58	30.5
4009402063	63	76	5.2	20.8	-	152	2.01	30.5
4009402076	76	90	5.2	20.8	-	178	2.74	30.5
4009402102	102	118	5.2	20.8	-	254	3.71	30.5

TEMPERATURE RANGE	-40 °C to +204 °C
SAFETY FACTOR	4:1
NORM	-
REINFORCEMENT	Helix-plied synthetic fabric with double wire helixspiral
TUBE	Black, STF (Super Thermo-Flo) Versigard® synthetic rubber
COVER	Black, weather resistant, STF (Super Thermo-Flo) Versigard® synthetic rubber
USE	Designed to transfer hot, nonoily air from manifold blowers or in-plant compressors to tanks used in the transfer of dry bulk materials.