









# 3 STEAM AND HOT WATER

RAKCALORSTEAM 165


RAKCALORSTEAM 230









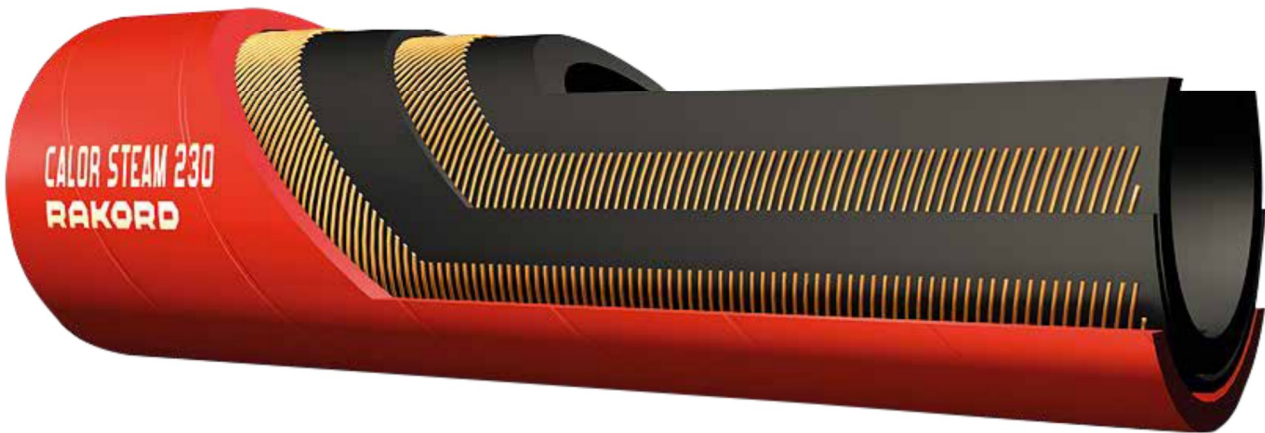

**RAKALORSTEAM 165**

Art. nr.								
4009504016	16	29	6	60	-	112	60	40
4009504019	19	33	6	60	-	133	70	40
4009504025	25	40	6	60	-	175	90	40
4009504032	32	48	6	60	-	224	120	40

TEMPERATURE RANGE	-30 °C to +165 °C
SAFETY FACTOR	10:1
NORM	EN ISO 6134 - Type 1 Class A
REINFORCEMENT	textile wrapped
TUBE	EPDM, black, smooth
COVER	EPDM, black, smooth, cloth impression, weather resistant
USE	Hot water and steam delivery hose up to +165 °C



### RAKCALORSTEAM 230

Art. nr.	 mm	 mm	 bar	 bar	 %	 mm	 g	 m
4009508013	13	28	18	180	-	130	397	40
4009508016	16	32	18	180	-	160	435	40
4009508019	19	38	18	180	-	190	550	40
4009508025	25	46	18	180	-	250	757	40

TEMPERATURE RANGE	-35 °C to +230 °C
SAFETY FACTOR	10:1
NORM	EN ISO 6134 - Type 2 Class B
REINFORCEMENT	two high tensile steel braids
TUBE	EPDM, black, smooth
COVER	EPDM, red, smooth, cloth impression, pin pricked
USE	Special hose for saturated steam, used in closed steam systems in heating and cleaning applications, drain after use. Also suitable for high pressure air and water applications.